


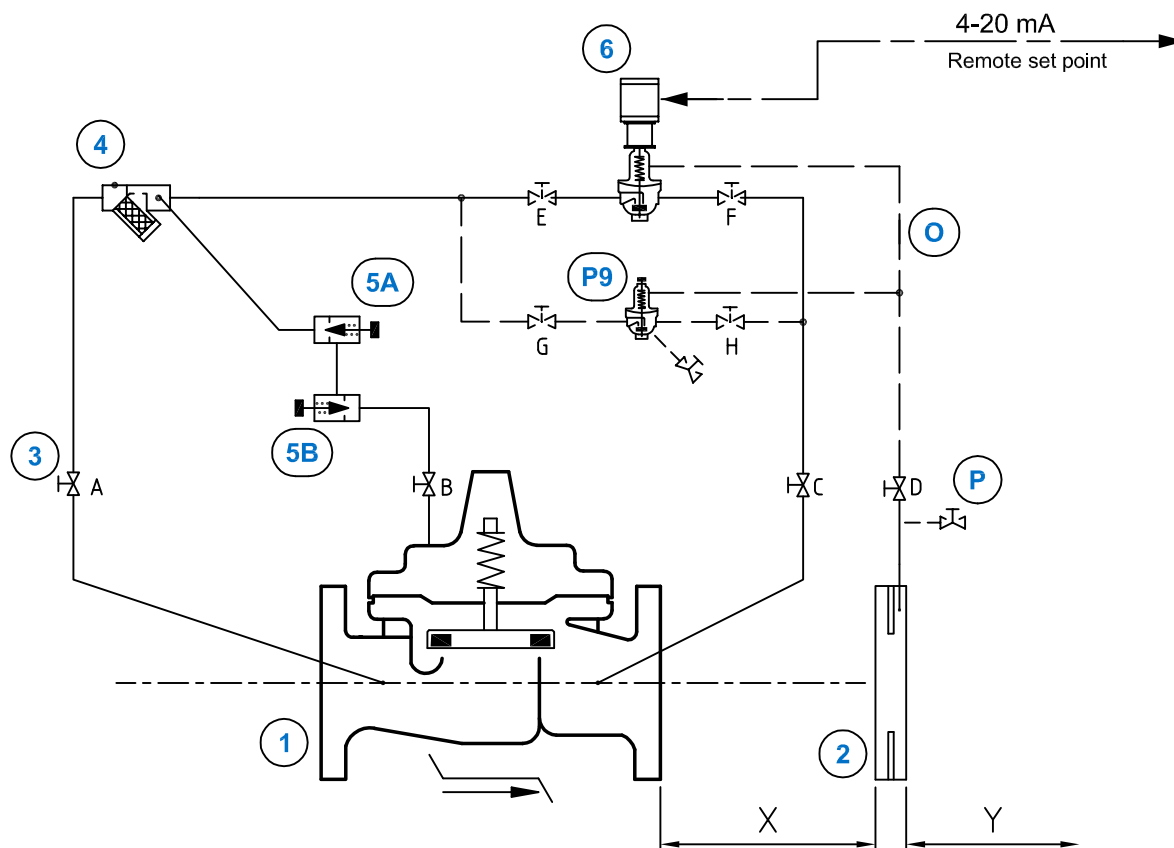

STANDARD EQUIPMENT

No	Description	Qty	Type
1	MAIN VALVE HYTROL AE/GE/NGE	1	100-01
2	ORIFICE PLATE ASSEMBLY	1	X52-A
3	ISOLATION BALL VALVE	4	RB-117
4	STRAINER WITH INCORPORATED ORIFICE	1	X44-A
5A	ONE-WAY FLOW CONTROL (OPENING SPEED)	1	CV
5B	ONE-WAY FLOW CONTROL (CLOSING SPEED)	1	CV
6	POSITIONING MOTORIZED DIFFERENTIAL PRESSURE CONTROL	1	CDHS-34

OPTIONAL FEATURES

No	Description	Qty	Type
O	NYLON PIPE Ø 6/3 mm	1	-
P	2-WAY PRESSURE COCK (Rp 3/8")	2	RB-117
P9	DIFFERENTIAL PRESSURE CONTROL	1	CDHS-18 + RB117

NOTES

AE/GE : DN 32 - DN 400 / NGE : DN 50 - DN 600

Wiring schematic : PCM340

OPTIONAL FEATURES : _____

NOT FURNISHED BY CLA-VAL : _____

Orifice plate assembly X52-A (2) may be fixed directly to the main valve outlet flange, however, better control is obtained, if it is mounted according to the following recommendation : distance X = 5x pipe diameter, distance Y = 3x pipe diameter.