




# CLA-VAL 50B-4KG1

Fire Protection Pressure Relief Valve  
(UL Approved) 3" - 8"

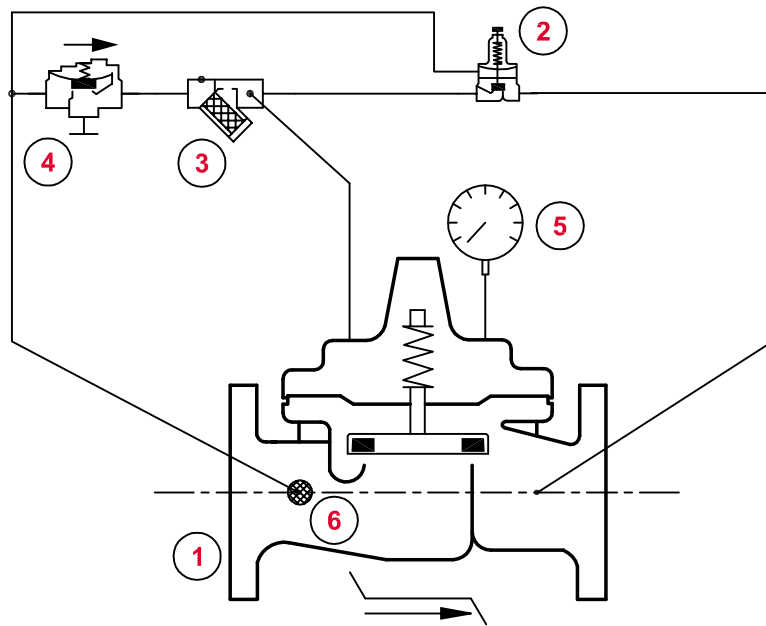

## STANDARD EQUIPMENT

No	Description	Qty	Type
1	MAIN VALVE HYTROL AE/GE/NGE	1	100-06*
2	PRESSURE RELIEF CONTROL	1	CRL**
3	STRAINER WITH INCORPORATED ORIFICE	1	X44-A
4	CHECK VALVE	1	81-01
5	PRESSURE GAUGE	1	
6	FLOW CLEAN STRAINER	1	X46A

## OPTIONAL FEATURES

No	Description	Qty	Type

## NOTES

AE/GE : DN 80 - DN 200 / 3" - 8"

100-06\* : R9SD99

CRL\*\* : UL Listing : 1,4 - 14 bar (20-200 PSI) / 7,0 - 21 bar (100-300 PSI)

FM Approved : 1,4 - 14 bar (20-200 PSI)

Assembly drawing: 0501003D

OPTIONAL FEATURES : — — — — —

NOT FURNISHED BY CLA-VAL : - - - - -